

E6 1/4" Plastic Bolted Pumps

Specifications and Performance

SPECIFICATIONS

E6

FLOW RATE (Adjustable) 0-4 gpm (151 lpm)

PORT SIZE Inlet and Outlet

I.D. 0.25" NPTF I.D.

O.D. 0.50" NPTM O.D.

AIR INLET 0.25" NPTF

AIR EXHAUST 0.75" NPTF

SUCTION LIFT 5.83' Dry/25.5' Wet
(1.78m/777m)

MAX. PARTICLE SIZE (Dia.) 0.3125" (1mm)

SHIPPING WEIGHTS

Acetal 5.00 lbs (2.27 kg)

Polypropylene 3.38 lbs (1.53 kg)


PVDF 4.13 lbs (1.87 kg)



PERFORMANCE

Determined by actual flow meter tests.

E6

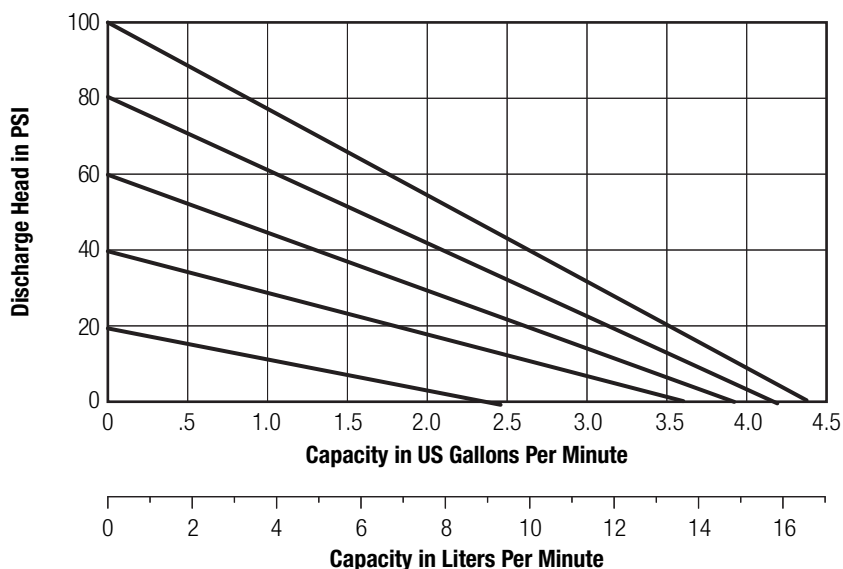

CAUTION: Do not exceed 125 psig (8.5 bars) air supply or liquid pressure.

DIMENSIONS

Consult factory for certified drawings.

E6

