


E2HP 2" High Pressure Pumps

Specifications and Performance

SPECIFICATIONS

E2HP


FLOW RATE (Adjustable) 0-69 gpm (261 lpm)
PORT SIZE
 Inlet and Outlet ... 2.0" ANSI, 300 lb class (DIN 50)
AIR INLET 0.50" NPT
AIR EXHAUST 1.0" NPT
SUCTION LIFT ... 20' Dry/25' Wet (6.09m/7.62m)
MAX. PARTICLE SIZE (Diameter) ... 0.25"(6.35mm)
SHIPPING WEIGHT
 Stainless Steel 91 lbs (41 kg)

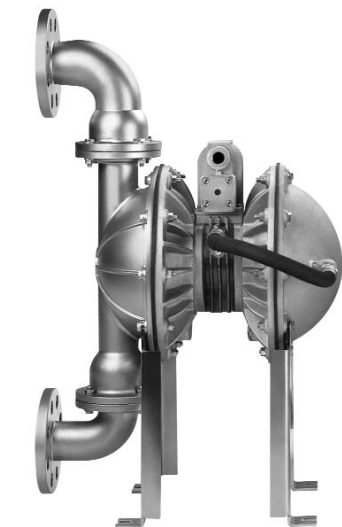

PERFORMANCE

Determined by actual flow meter tests.

E2HP

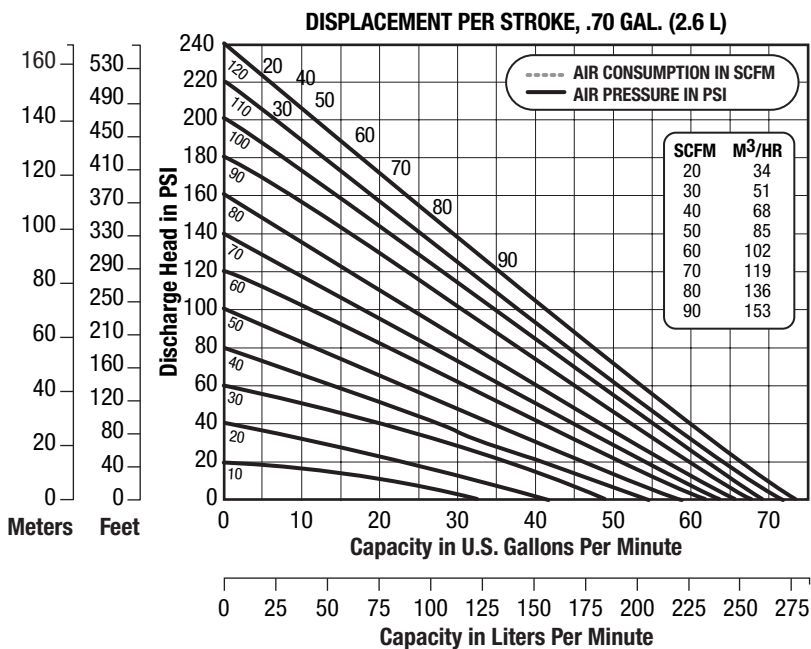


CAUTION: Do not exceed 100 psig (6.9 bars) air supply or liquid pressure.

DIMENSIONS

Consult factory for certified drawings.

E2HP

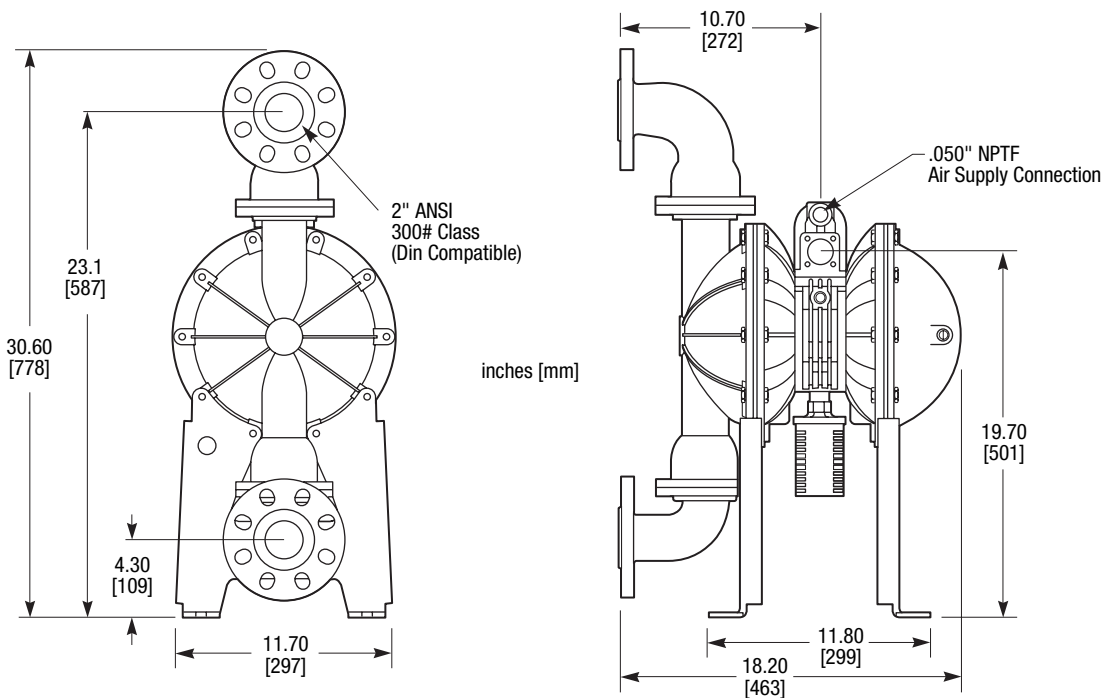

N25 1" Full Flow High Pressure Pumps

Specifications and Performance

SPECIFICATIONS

N25

FLOW RATE (Adjustable) 0-30 gpm (125 lpm)

PORT SIZE

Inlet and Outlet..... 1.0" NPTF

AIR INLET 0.50" NPTF

AIR EXHAUST 0.375" BSP

SUCTION LIFT ... 20' Dry/25' Wet (6.09m/7.62m)

MAX. PARTICLE SIZE (Diameter) 0.125"(3mm)

SHIPPING WEIGHT

Aluminum 88 lbs (40 kg)


Stainless Steel 110 lbs (50 kg)



PERFORMANCE

Determined by actual flow meter tests.

N25

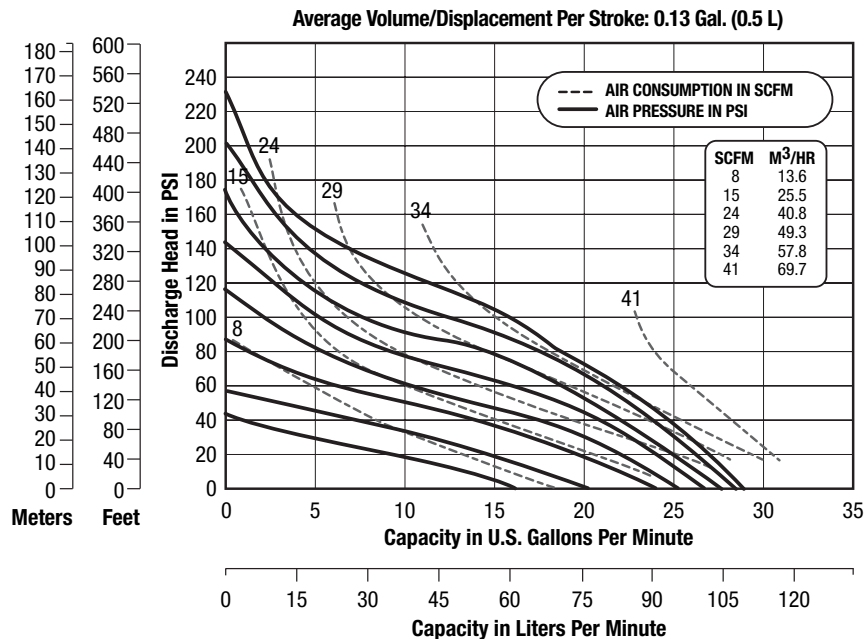


CAUTION: Do not exceed 100 psig (6.9 bars) air supply or liquid pressure. ????????

DIMENSIONS

Consult factory for certified drawings.

N25

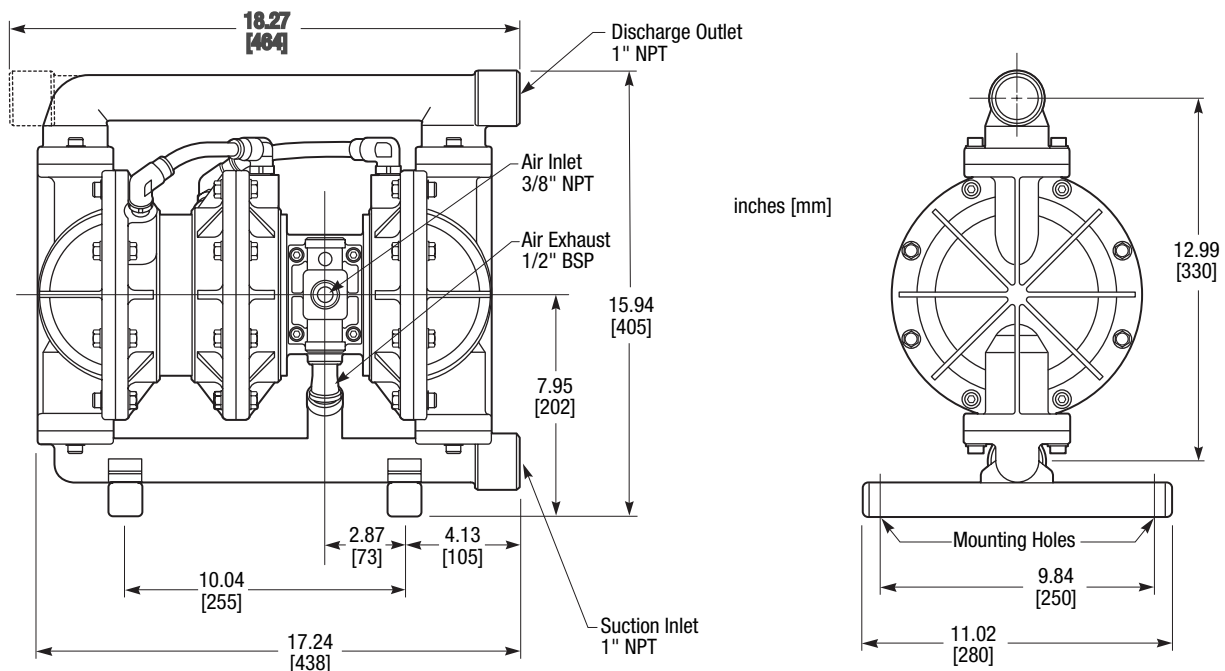

N50 2" Full Flow High Pressure Pumps

Specifications and Performance

SPECIFICATIONS

N50

FLOW RATE (Adjustable) 0-90 gpm (34 lpm)

PORT SIZE

Inlet and Outlet..... 2.0" NPTF

AIR INLET 0.75" NPTF

AIR EXHAUST 0.75" BSP

SUCTION LIFT ... 20' Dry/25' Wet (6.09m/7.62m)

MAX. PARTICLE SIZE (Diameter) 0.25"(6mm)

SHIPPING WEIGHT

Aluminum 147 lbs (67 kg)


Stainless Steel 165 lbs (75 kg)



PERFORMANCE

Determined by actual flow meter tests.

N50

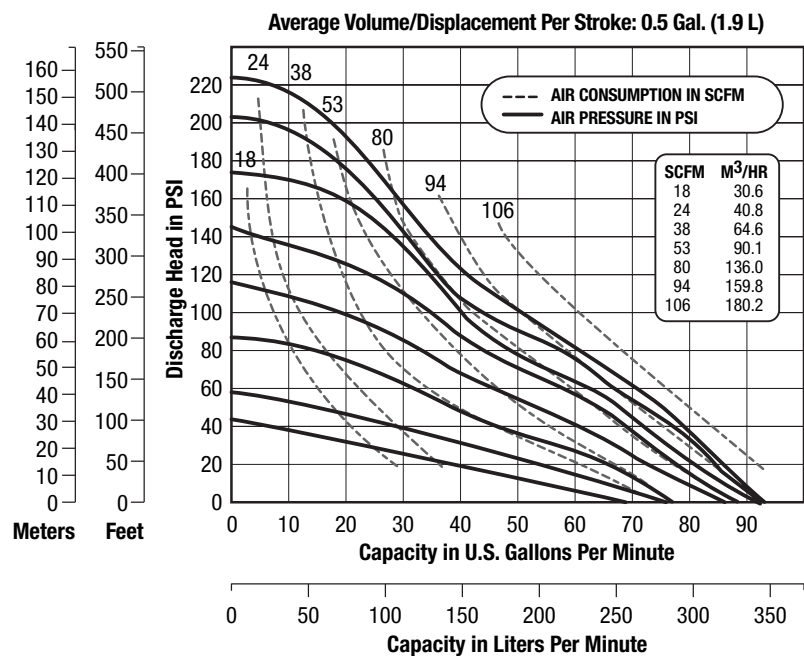

CAUTION: Do not exceed 100 psig (6.9 bars) air supply or liquid pressure.?????????

DIMENSIONS

Consult factory for certified drawings.

N50

